


ABC

XTAR PB2SL CHARGER/POWERBANK

€27,50

Oplader en Powerbank in 1

Geschikt voor 18650 en 21700 accu's



SKU: N/A

Categories: [Accessoires](#), [Accessoires](#), [Accessoires](#), [Overige](#)

Tag: [Xtar](#)



GALLERY IMAGES





2-in-1 Charger & Power Bank

Experience a new dimension of energy convenience, whether you're at home, in the office, or on the go.

18650/21700
40-Times

Wear-resistant
soft side

Rotary
buckle

Accessory
bracket

Compatible with All Size of 18650 - 21700 Batteries

Easily access to power sources for extended use, DIY the capacity as your will, traveling light without compromising on power.

Rapid Charging with QC3.0 & PD3.0

The PB2SL utilizes Quick Charge 3.0 and USB power delivery (PD3.0) for lightning fast charging speeds of up to 18W.

3H
For 2x 5000mAh 21700

1.5H
For iPhone 13/14

Dual Output Ports: Type-C & USB-A

Charge multiple devices simultaneously via Type-C and USB-A ports for multitasking convenience.

Smart Energy Balance

The PB2SL uses intelligent charging and discharging balancing technology, enhancing overall performance and extending battery life. Simultaneously charging and discharging with ease, even from cells of varying capacities.

Intelligent 3-Stage Charging Method

High efficient TC-CC-CV charging method for maximizing performance and extending battery life.

- Trickle Current (TC) to "awake" low-voltage batteries.
- Constant Current (CC) for normal charging.
- Constant Voltage (CV) to ensure fully charge and less damage.

Revive with 0V Activation

Bring most of the over-discharged batteries back to life, minimizing waste and promoting sustainability.


Enhanced Battery Security & Portability

Removable locking spacer
accommodates flat-top cells

Rotating plastic piece
flips 180° cells tighter

Magnetic cover
closes against shut and battery fall out.

So you can throw PB2SL in your pocket or bag without worry.

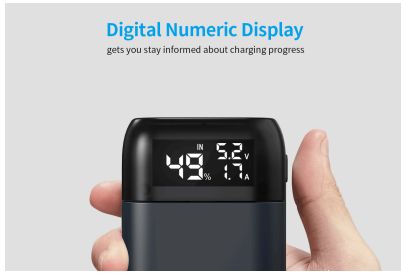

Specification	
Model	PB25L
Input	QC3.0 & PD3.0 (5V=2A / 9V=2A / 12V=1.5A)
Constant Current	2Ax2/2Ax1/1Ax2
End-of Charge Voltage	4.20±0.05V
End-of Charge Current	≤120mA
USB Output	QC3.0 & PD3.0 (5V=2A / 9V=2A / 12V=1.5A)
Operating Temperature	0-40°C
Size	L125mm x W58mm x H28mm
Net Weight	85g

PRODUCT DESCRIPTION

Travel light, Charge right
2-in-1 Portable Charger with Power Bank Function

- Apply to all size of 18650, 18700, 20700, 21700 batteries.
- DIY the power bank capacity by simply replacing the batteries.
- Dual-Port output, Fast charging
- As a charger: 3hrs nearly fully charge 2 x 21700 5000mAh batteries.
- As a power bank: about 1.5hrs fully charge an iPhone 13/14.
- Easier to carry with removable locking spacer and rotating plastic piece.

ADP



Smart Energy Balance

The PB2SL uses intelligent charging and discharging balancing technology, enhancing overall performance and extending battery life. Simultaneously charging and discharging with ease, even from cells of varying capacities.



ADP



Intelligent 3-Stage Charging Method

High efficient TC-CC-CV charging method for maximizing performance and extending battery life.

- Trickle Current (TC) to “awake” low voltage batteries.
- Constant Current (CC) for normal charging.
- Constant Voltage (CV) to ensure fully charge and less-damage.

ADP



Revive with 0V Activation

Bring most of the over-discharged batteries back to life, minimizing waste and promoting sustainability.

Enhanced Battery Security & Portability

Removable locking spacer

accommodates flat-top cells

Rotating plastic piece

fixes 18650 cells tighter

Magnetic cover

shields against dust and battery fall out.

So you can throw PB2SL in your pocket or bag without worry.



AD



Blue



Red



Black

Fashionable colors, fire-proof material

Wear-resistant skin

High-quality metal negative poles

for lasting durability



Built-in ribbon

for effortlessly remove batteries



Specification

Model	PB2SL
Input	QC3.0 & PD3.0 (5V=2A / 9V=2A / 12V=1.5A)
Constant Current	2Ax2/2Ax1/1Ax2
End-of Charge Voltage	4.20±0.05V
End-of Charge Current	≤120mA
USB Output	QC3.0 & PD3.0 (5V=2A / 9V=2A / 12V=1.5A)
Operating Temperature	0-40°C
Size	L125mm x W58mm x H28mm
Net Weight	85g



Package

Charger, USB-A to USB-C Cable, Accessory Bracket, Manual



Rapid Charging with QC3.0 & PD3.0

The PB2SL utilizes Quick Charge 3.0 and USB power delivery (PD3.0) for lightning-fast charging speeds of up to 18W.



3H
for 2x 5000mAh 21700



1.5H
for iPhone 13/14



AD

Compatible with All Size of 18650 - 21700 Batteries

Easily access to power sources for extended use,
DIY the capacity as your will, traveling light without compromising on power.



AD

2-in-1 Charger & Power Bank

Experience a new dimension of energy convenience, whether you're at home, in the office, or on the go.



18650/21700P
65-78mm



Wear-resistant
soft skin



Rotary
buckle



Accessory
bracket



ADDITIONAL INFORMATION

color

Black, Blue, Red